

MCL1204ROG1BL1T DATASHEET

Chip Type LED, 1204, Right Angle Lens, Orange, Blue




VENKEL LTD.

Part Number	Size	Emitting Color	Emitting Material	Lens-Color	Viewing Angle (2θ 1/2)
MCL1204ROG1BL1T	1204	Orange/Blue	AllnGaP	Water Clear	140°


Electrical & Optical Specifactions (T _A =25°C)		Orange	Blue	Unit
Luminous Intensity (Min.)	I _v	18.0	28.5	mcd
Luminous Intensity (Typ.)	I _v	28.5	45.0	mcd
Forward Voltage (Min.) (I _F =5mA)	V _F	1.6	2.55	V
Forward Voltage (Max.) (I _F =5mA)	V _F	2.4	3.15	V
Reverse Current (Max) (V _R =5V)	I _R	<100	<100	uA
Peak Wavelength (Typ.) (I _F =5mA)	λ _P	611	468	nm
Dominant Wavelength (Typ.) (I _F =5mA)	λ _D	605	470	nm
Spectral Line Half Width (Typ.) (I _F =5mA)	Δλ	17	40	nm

Absolute Maximum Ratings (T _A =25°C)		Orange	Blue	Unit
Reverse Voltage	V _R	5		V
DC Forward Current	I _F	20		mA
Peak Forward Current 1/10 Duty Cycle @ 10KHz	1 _{FP}	40	60	mA
Power Dissipation	P _D	48	78	mW
Operating Temperature	T _A	-40 ~ +85		°C
Storage Temperature	T _{stg}	-40 ~ +100		

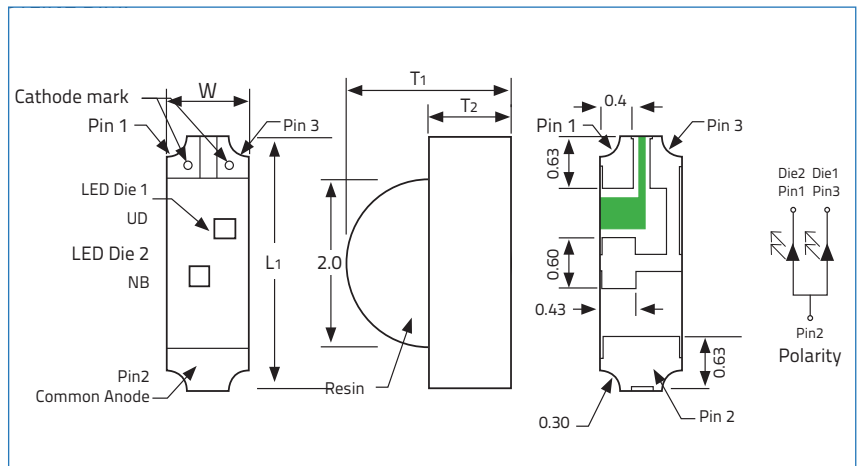

Dimensions		Units: Inches (mm)	
L ₁	W	T ₁	T ₂
0.1189±0.004 (3.0±0.1)	0.0394±0.004 (1.0±0.1)	0.0787±0.004 (2.0±0.1)	0.0394±0.004 (1.0±0.1)

Soldering Pad Layout

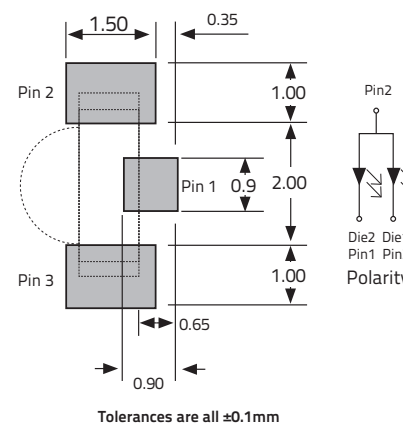

MCL1204ROG1BL1T DATASHEET

Chip Type LED, 1204, Right Angle Lens, Orange, Blue



VENKEL LTD.

Graphs

Fig.1 Forward Current vs Forward Voltage

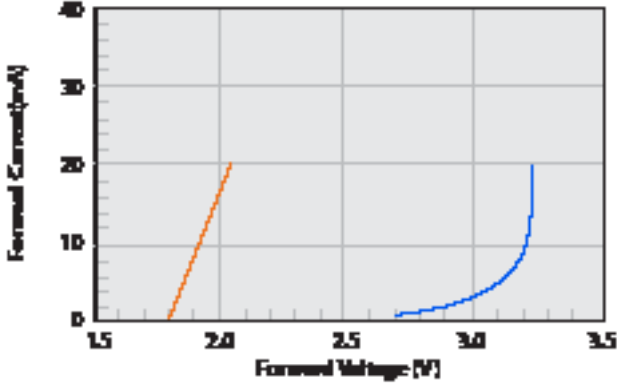


Fig.4 Relative Intensity vs Wavelength

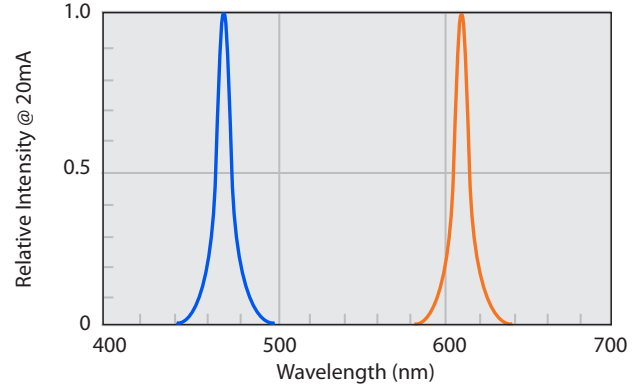


Fig.2 Relative Intensity vs Forward Current

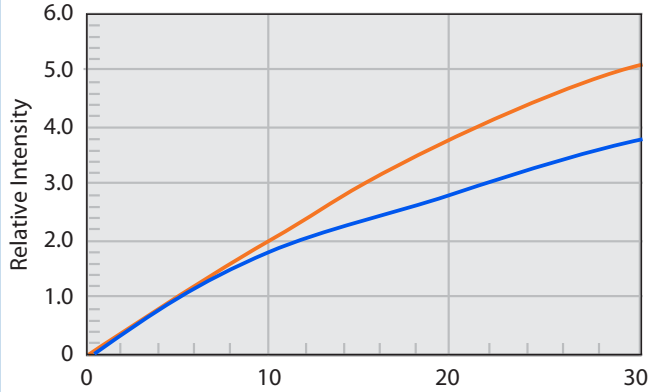


Fig. 5 Direct Radiation


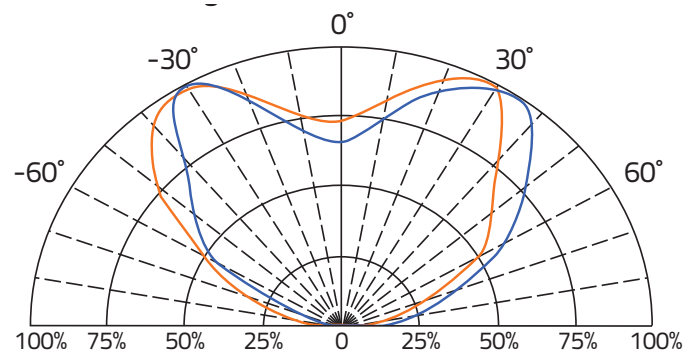


Fig.3 Current vs Temp

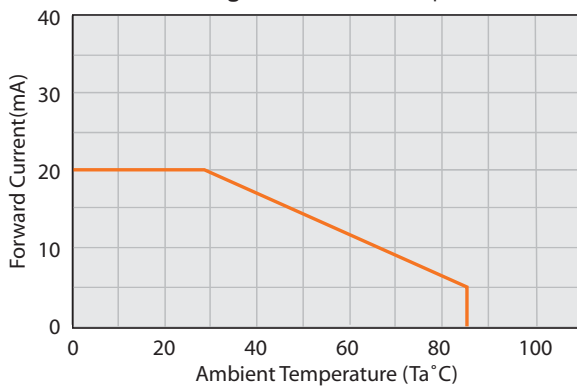

Environmental information

RoHS Status	6 of 6 Compliant
REACH Status	Compliant
Halogen Status	Halogen Free
Conflict Mineral Status	Conflict Mineral Free
Moisture Sensitivity Level (MSL)	3

Reflow profile

Max Reflow Temperature	260°C
Number of Reflow Cycles	2

MCL1204ROG1BL1T DATASHEET

Chip Type LED, 1204, Right Angle Lens, Orange, Blue



VENKEL LTD.

Label Example

Item: MCL1204ROG1BL1T
Chip Type LED,1204,Right Angle Lens,Orange, Blue
Qty: 3000 D/C: 1616

Lot: E1A1A22L12
VF: 1.6-2.4
BIN/HUE: M/D-N/AA VF: 2.55-2.65

VENKEL LTD
YOUR SINGLE SOURCE FOR SURFACE MOUNT PASSIVES

Codes:

VF: Forward Voltage | BIN: Luminous Intensity | HUE: Dominant Wavelength

Luminous Intensity Classification (BIN Code)

Orange BIN Code	Iv(mcd) at 5mA	
	Min.	Max.
M	18	28.5
N	28.5	45
P	45	71.5

Blue BIN Code	Iv(mcd) at 5mA	
	Min.	Max.
N	28.5	45
P	45	71.5

Dominant Wavelength Classification (HUE Code)

Orange HUE Code	λD (nm) at 5mA	
	Min.	Max.
B	600	603
C	603	606
D	606	609
E	609	612

Blue HUE Code	λD (nm) at 5mA	
	Min.	Max.
AA	460	465
AB	465	470
AC	470	475

MCL1204ROG1BL1T DATASHEET

Chip Type LED, 1204, Right Angle Lens, Orange, Blue



VENKEL LTD.

Reel Specifications		Units: mm		
M	C	F	E	G
178±1.50	56.0±1.0	12.0±1.0	60.0±1.0	9.0±1.0

Packaging Specifications	
Reel Size:	7"
Quantity per Reel :	3,000

Storage Specifications
1. Storage temperature and RH: 5°C~35°C, RH60%
2. Once the package is opened, the LEDs should be used within a week. Otherwise, they should be kept in a moisture proof bag with desiccant. We suggest that you use this product within one year from date code.
3. If opened for more than one week in an atmosphere of 5°C~35°C, RH60%. The parts should be heat treated at 60°C±5°C for 15 hours.

Tape Specifications		Units: mm		
T	W	A	B	F
1.2±0.10	8.0±0.3	3.2±0.10	2.2±0.10	3.5±0.05
E	H	J	D	G
1.75±0.1	4.0±0.1	2.0±0.05	1.5±0.1	4.0±0.1

MCL1204ROG1BL1T DATASHEET

Chip Type LED, 1204, Right Angle Lens, Orange, Blue



VENKEL LTD.

Environmental Test Criteria			
Classification	Test Item	Test Condition	Sample Size
Endurance Test	Operating Life	1. 25°C 2. 1000hrs	40
	High Temperature Storage	1. 85°C±5°C 2. 1000hrs	40
	Temperature, Humidity Bias	1. 40°C 2. 93% 3. 1000hrs	40
Environmental Test	Solderability	1. 245°C / 3±1 sec 2. 260°C / 10±1 sec	40